

Product Data Sheet


NPS PRO XL Twin KSB301 Ground Water Pump Station



Product Data Sheet

NPS PRO XL Twin KSB301 Ground Water Pump Station

Chamber Material	MDPE
Chamber Max Volume	300 Litres
Volume Below Inlets	225 Litres
Isolation Valve	To be fitted externally to chamber - supplied by installer
None return valve	Rubber EDPM swing check
Fixed Inlets	4 off at 90 degree orientations
Cable Duct	none supplied
Discharge Connection	40mm solvent weld
Internal Pipework and fittings	All manufactured to EN1452-2/3, ISO161/1, BS21, DIN2999, ISO7 - Note threaded fittings are rated at 12 Bar.
Pump/s	KSB301 Amadrainer
Riser/Lid	Clark Drain CD452 driveway lid 35KN load. Double seal plastic and recessed galvanised available on request
Float switch bracket	None supplied
Inlet seal (choice of following)	1 x 110mm / 1 x 55mm to 75mm / 1 x 35mm to 50mm
Optional - NPS unique internal water supply	

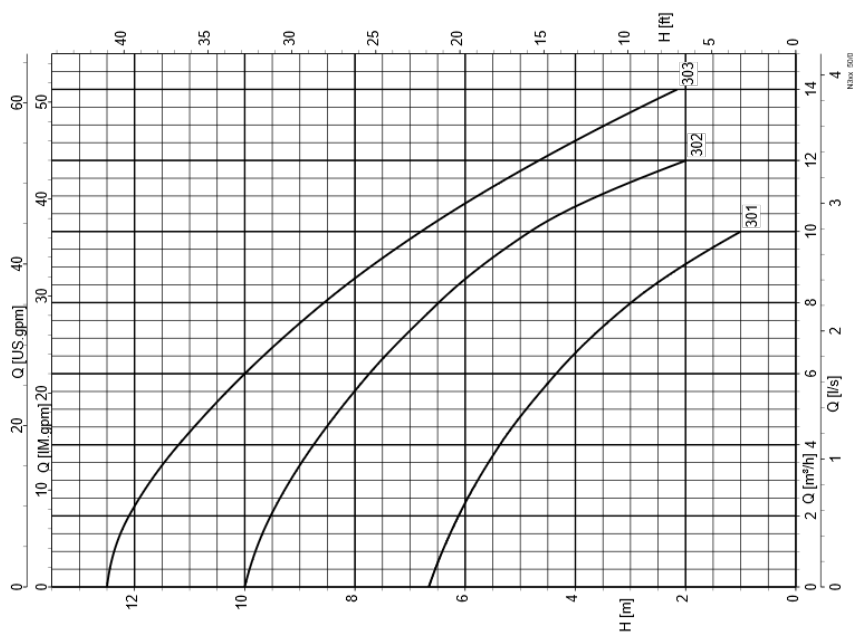

Product Data Sheet

NPS PRO XL Twin KSB301 Ground Water Pump Station

